


Series Twist Drill

I. Picture

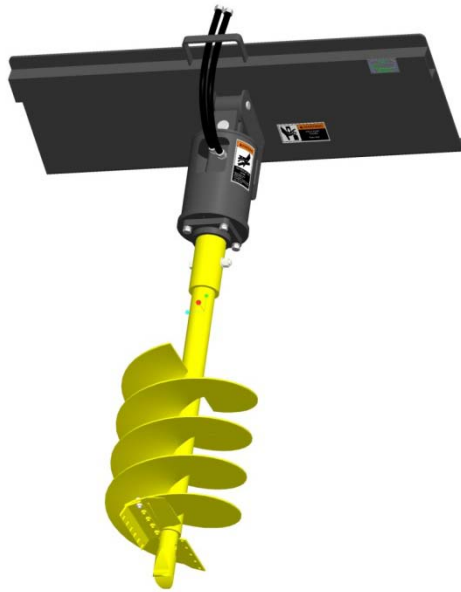

II. Main technical parameters of product:

Technical Parameters of Drive Unit		
Model	S24	S36
Total length (mm)	300	465
Total width (mm)	230	335
Total height (mm)	710	935
Hexagonal shaft size (mm)	50.8	70
Weight (including hanging parts) (Kg)	140	270
Flow (l/min)	70-90	90-130
Allowed maximum pressure (MPa)	21	21
Drilling diameter (mm)	200-450	300-600
Maximum drilling depth (m)	1.5	2.5



Drill rod (common drill rod code SD)						
Model	SD08	SD12	SD16	SD18	SD20	SD24
Screw outer diameter	200	300	400	450	500	600
Length	1200	1200	1200	1200	1200	1200

※ Parameters of drill rods equipped for different drive units are different

Extension rod					
Model	L-300	L-500	L-600	L-1000	L-1200
Length (mm)	300	500	600	1000	1200
Reference weight (kg)	14	16	18	23	25

Machinery combination model	
Skip steer loader	0510 <u>SXX</u> <u>SDXX</u> + L- <u>XX</u>
Loader	BM02 <u>SXX</u> <u>SDXX</u> + L- <u>XX</u>
Excavator	HN29 <u>SXX</u> <u>SDXX</u> + L- <u>XX</u>
Mini skip steer loader	Mini0510 <u>SXX</u> <u>SDXX</u> + L- <u>XX</u>

III. Main characteristics of product

Applicable to skip steer loaders, loaders, excavators, and mini skip steer loaders, used for excavation of tree pits for afforestation and pole pits on both sides of the road, and so on, with high working efficiency and ease of use.

Note: HCN products are constantly updated and improved for users. Rights to change the parameters and design are reserved without notifying the users in advance. In case of possible appearance and color differences between the products shown in the pictures and the actual products, the actual one shall prevail.